

# **WEEKLY PROGRAMMABLE**

## **ELECTRONIC TIMER**


TYPE : DHC12

- Advanced pre-setting one week before.
- Eight programmable ON/OFF settings.
- To-the-minute setting accuracy.
- Manual override: ON-AUTO-OFF.
- Any one set of time can be changed by using Reset/recall
- LCD displays real time to Hour/Minute/Second and ON/AUTO/OFF.
- Precise and stable timing control by using crystal oscillator.


### **TECHNICAL DATA**

Voltage limit :	AC 170V ~ 240V (50Hz)	Number of circuits :	1a
Hysteresis :	1s/d (at25 )	Load capacity :	AC250V 16A ( resistive )
On/off operation :	8on & 8off	Minimum interval:	1minute
Power consumption :	4VA	Service life :	Mechanically: 10 <sup>7</sup>
Weight :	Approx 175g		Electrically: 10 <sup>5</sup>
Display ;	LCD	Ambient temperature :	-10 ~ 55

### **DIMENSIONS**

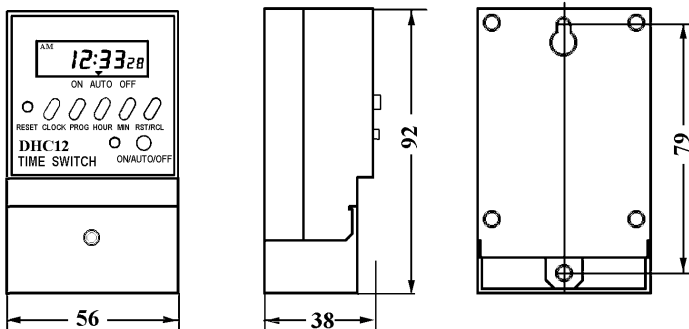

### **CONNECTIONS**



## OPERATING INSTRUCTION:

1. First time use this timer switch, please input AC and let battery recharge .after then press reset key.
2. At first time, the timer switch is in 24h mode .If you you want change to 12h mode please press on  
“ CLOCK ” key 5 sce .and LCD will display AM If you want rechang to 24h mode ,and press on “ CLOCK”  
key 5 sce to return.

### 3. Programming :

Step	Key	Programming
1	Press <b>PROG</b>	Setting 1 ON time ( display 1 on )
2	Press <b>HOURL/ MIN</b>	Set hours and minutes
3	Press <b>PROG</b>	Setting 1 off time ( display 1 off )
4	Press <b>DAY</b>	Select days of week ( If you want same set in every day,you need not press this key)
5	Press <b>HOURL/ MIN</b>	Set hours and minutes
6	Repeat step 2-6	Set 2-8 on/off time
7*	Press <b>CLOCK</b>	End

**\*\*IF you need not 8 time setting press“ CLOCK ” key to the end**

### 4. CLOCK SETTING

- (1) Press “ CLOCK ” and “ HOUR ” together till correct hour is shown.
- (2) Press “ CLOCK ” and “ MIN ” together till correct min is shown.
- (3) Press “ ON/AUTO/OFF ” key to display ON AT or AT OFF. ( If this clock in your program is ON selects ON  
AT ,and this clock in your program is OFF selects AT OFF )

**5. Press “ ON/AUTO/OFF ” key can select timer switch to ON/OFF/AUTO**

**6. For cancel engagements , press “ RST / RCL ” then “ - -:- ” is displayed on LCD to confirm cancel . May  
press “ RST / RCL ” again to resume initial setting.**

### NOTE:

**THE POWER CONSUMPTION OF CONNECTED ELECTRICAL APPLIANCES, SHALL BE WITHIN .  
THE LIMITATION OF FOLLOWING RATED CAPACITY.**

---