

TIMER

DH48S-S

TWIN TIMER

DH48S-S

- DIN-sized 48 × 48mm
- Time ranges (1s~99min)

CHARACTERISTICS

- Time ranges:

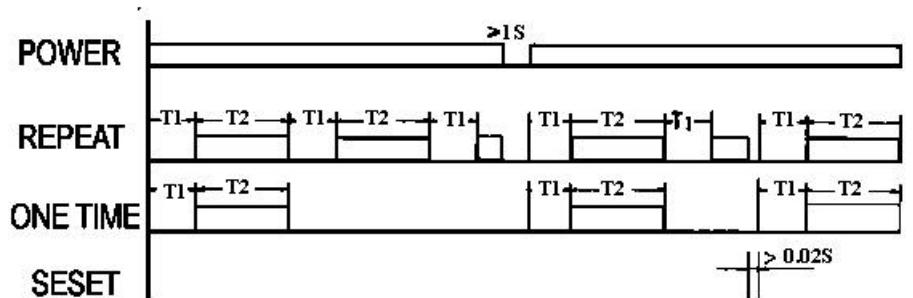
Select switch:	S/S	S/M	M/S	M/M
T1 time ranges:	1s~99s	1s~99s	1m~99m	1m~99m
T2 time ranges:	1s~99s	1m~99m	1s~99s	1m~99m

- Supply voltage : AC220V (50/60Hz)
- Control output: AC 250V 3A (Resistive)
- Operating voltage range U_e 85% ~ 110%
- Contact: 1c
- Setting error : 0.01%+0.05s
- Panel cutout: 45 × 45 mm
- Ambient temperature : Operating: -10 to 55
- Weight; 0.3kg

temperature :

- Power consumption : ≤ 3VA

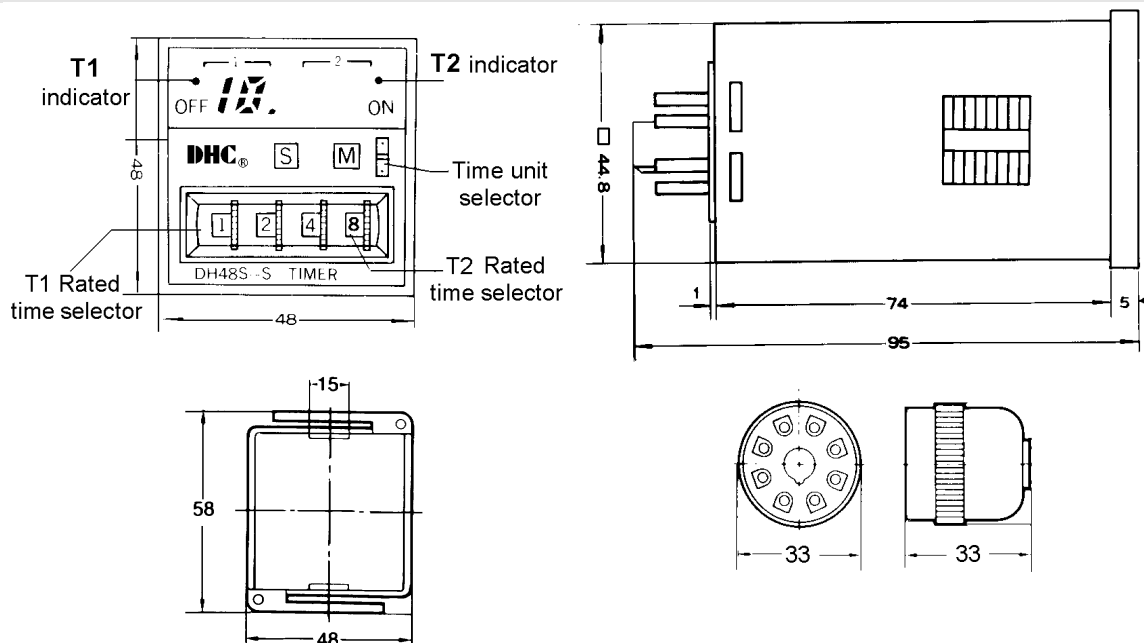
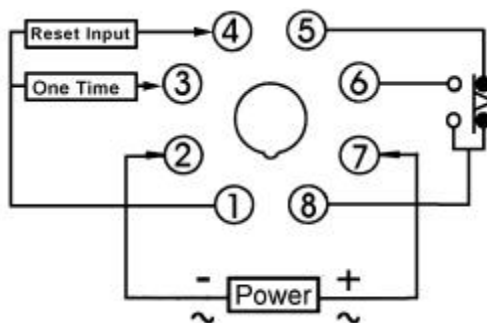
OPERATION MODE



DH48S-S

DHC® TIMER

DH 48S-S

DIMENSIONS**CONNECTIONS**

DAHUA INSTRUMENTS & INSTRUMENTATION CO., LTD