

DP3

3 1/2 DIGIT VOLTAGE , AMPERE METER

- DIN-size (48H ×96Wmm) ,
- 0.56Inch LED Display .
- Dual slope A/D conversion, high anti-interference.
- Measurement precision, performance reliable.


ORDERING CODE

<p>DP3-A-V</p> <p>V: Voltage A: Ampere A: AC D: DC</p> <p>3 1/2 Digit display Panel meter</p>	<p>DP3-A-V(V)</p> <table border="1"> <tr> <td></td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> </tr> <tr> <td>1</td> <td>600*</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td>199.9</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td>19.99</td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td>1.999</td> </tr> </table> <p>600V</p>		5	6	7	8	1	600*				2		199.9			3			19.99		4				1.999																				
	5	6	7	8																																										
1	600*																																													
2		199.9																																												
3			19.99																																											
4				1.999																																										
<p>AC DIGIT VOITMETER: Direct Input: AC 600V, 199.9V, 19.99V, 1.999V PT Input: It according to customer's offers</p> <p>AC DIGIT AMMETER: CT Input (:5A) : 10A, 15A, 20A, 50A, 100A, 150A, 200A, 500A, 1000A, 500A 2000A Direct Input:5A</p> <p>DC DIGIT VOITMETER: Direct Input: DC 600V, 199.9V, 19.99V, 1.999V</p> <p>DC DIGIT AMMETER: CT Input (:75mV/50mV) : 10A, 15A, 20A, 50A, 100A, 150A, 200A, 500A, 1000A, 500A 2000A</p>	<p>DP3-D-A(A)</p> <table border="1"> <tr> <td></td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>5</td> <td>500</td> <td>50.0</td> <td>5.00</td> <td>0.500</td> </tr> <tr> <td>6</td> <td>1000*</td> <td>100.0</td> <td>10.00</td> <td>1.000</td> </tr> <tr> <td>7</td> <td>1500</td> <td>150.0</td> <td>15.00</td> <td>1.500</td> </tr> <tr> <td>8</td> <td>2000</td> <td>200.0</td> <td>20.00</td> <td>2.000</td> </tr> </table> <p>DP3-A-A (A)</p> <table border="1"> <tr> <td></td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> </tr> <tr> <td>1</td> <td>500</td> <td>1000</td> <td>1500</td> <td>1999</td> </tr> <tr> <td>2</td> <td>50.0</td> <td>100.0</td> <td>150.0</td> <td>199.9</td> </tr> <tr> <td>3</td> <td>5.00*</td> <td>10.00</td> <td>15.00</td> <td>19.99</td> </tr> </table> <p>5.00A</p>		1	2	3	4	5	500	50.0	5.00	0.500	6	1000*	100.0	10.00	1.000	7	1500	150.0	15.00	1.500	8	2000	200.0	20.00	2.000		5	6	7	8	1	500	1000	1500	1999	2	50.0	100.0	150.0	199.9	3	5.00*	10.00	15.00	19.99
	1	2	3	4																																										
5	500	50.0	5.00	0.500																																										
6	1000*	100.0	10.00	1.000																																										
7	1500	150.0	15.00	1.500																																										
8	2000	200.0	20.00	2.000																																										
	5	6	7	8																																										
1	500	1000	1500	1999																																										
2	50.0	100.0	150.0	199.9																																										
3	5.00*	10.00	15.00	19.99																																										

SPECIFICATION

• Power Supply:	AC/DC 100~240
• Accuracy:	0.5%FS±1Digit
• Display:	LED Red
• Operating temperature:	0~50℃ <85%RH
• Power consumption:	≤4VA
• Weight:	260g
• Panel cutout:	45×92 mm
• Input:	AC DIGIT VOITMETER 600 (MAX700V)
	AC DIGIT AMMETER:5A

DIMENSISONS

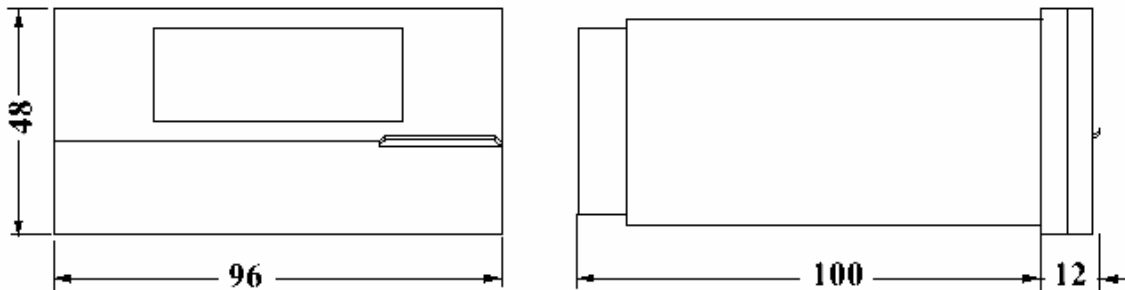

CONNECTIONS

