

DHC TIMER

JSS25

DIGITAL TIMER

JSS25

- DIN-sized 72×72mm
- Up/down diaply
- Time ranges(0.01s~99h99min)





CHARACTERISTICS

- Time ranges:


Select switch:	<u>h</u>	<u>h</u>	<u>m</u>	<u>m</u>	<u>s</u>	<u>s</u>
UP/DOWN	UP	DOWN	UP	DOWN	UP	DOWN
Time ranges:	1m-99h99m		1s-99m99s		0.01s-99.99s	

- | | | | |
|--------------------------|-----------------------|-------------------|------------------------|
| ●Supply voltage : | AC220V (50/60Hz) | ●Control output: | AC 250V 3A (Resistive) |
| ●Operating voltage range | Ue85%~110% | ●Contact: | 2c |
| ●Setting error : | 0.01%+0.05s | ●Panel cutout: | 68×68 mm |
| ●Ambient | Operating:-10°Cto55°C | ●External power | DC 12v 20Ma(max) |
| ●Power consumption : | ≤4VA | ●Output transior: | 100mA 30V |
| ●Display: | Up/Down | ●Reset Timer: | Reset input:20ms |
| ●Weight: | 0.5 kg | | Power down reset≥ |

DIMENSIONS

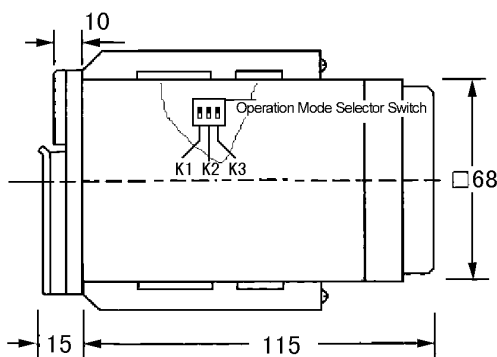


OPERATION MODE

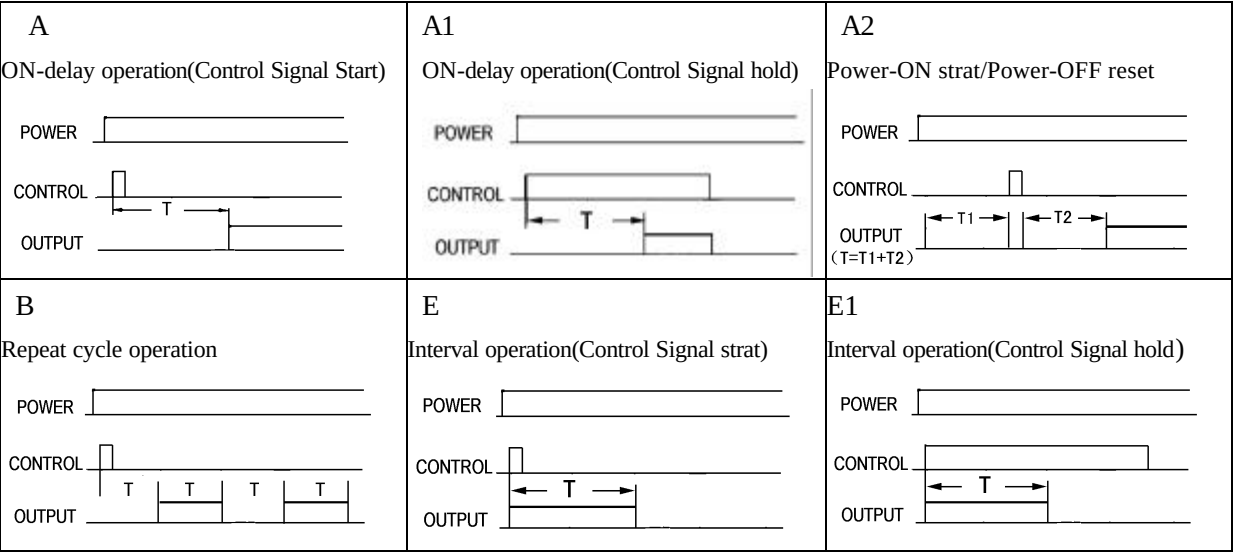

CONNECTIONS

Operation Mode Selector Switch

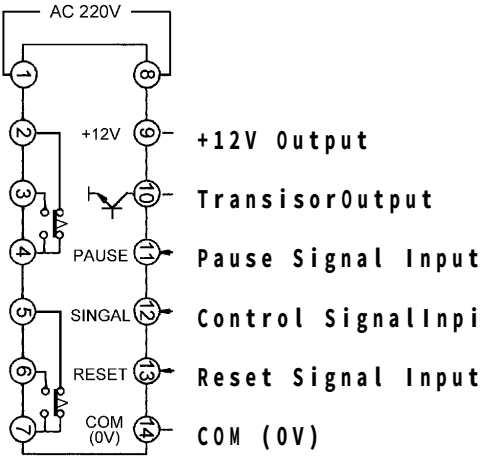

MODE	FUNTION	K1	K2	K3
A	ON-delay operation (Control Signal Start)	OFF	OFF	OFF
A1	ON-delay operation (Control Signal Hold)	OFF	OFF	ON
A2	Power-ON Start /Power-OFF Reset	OFF	ON	OFF
B	Repeat Cycle Operation	OFF	ON	ON
E	Interval operation (Control Signal Start)	ON	OFF	OFF
E1	Interval operation (Control Signal Start)	ON	OFF	ON

- * The Internal Unit Comes Out By Loosening The Internal Unit Fixing Screw.
- ** Leave Factory Is A2 MODE.