

# TIMER

**DHC7B**

**SOLID-STATE TIMER**

- DIN-size 72×72mm
- Designed with an emphasis on ease of operation.
- Any desired time can be set digitally within a range from 0.01 s to 99 h59m
- On-line change of set value possibly
- LED display

## SPECIFICATIONS


Operation mode: A3

- Timer rang :  
0.01s~ 99.99s  
1s ~ 99m59s  
1m ~ 99h59m
- Power: AC/DC 100~240V
- Accuracy: ≤ 0.01%+0.05S
- Control output : 3A AC250V (resistive load)
- Electrically life: ≥10<sup>5</sup>
- Mechanically life: ≥10<sup>7</sup>


- Operation temperature: -10°C ~ 55°C
- Panel cutout: 68×68mm
- Power consumption: ≤3.5VA
- Min input signal width: 20 ms
- Reset by power off: 0.5S
- Weigh: 0.3kg
- Humidity: 35%~85% RH

## OPERATION MODES

A3 MODE

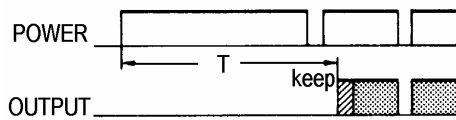

## CONNECTIONS

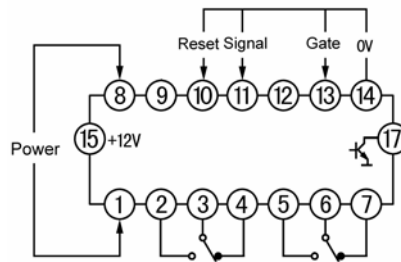

## DIMENSISONS

